






Ring 40
UK/EU: PR059120XX

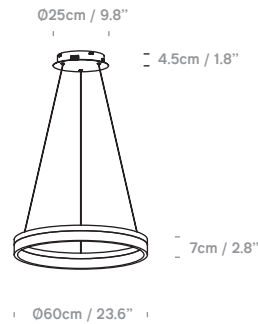


Ring 60
UK/EU: PR059140XX

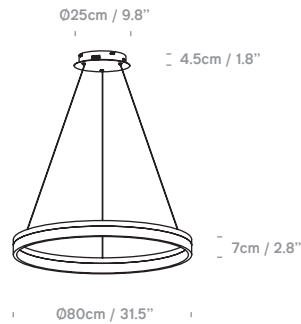


Ring 80
UK/EU: PR059160XX

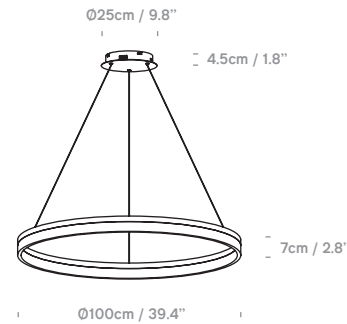

Ring 100
UK/EU: PR059190XX

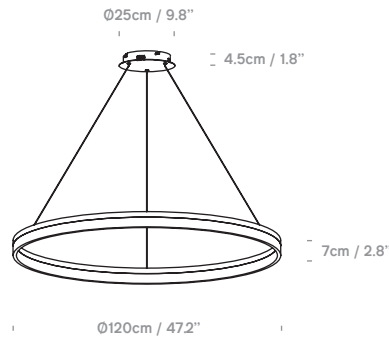

Ring 120
UK/EU: PR059195XX

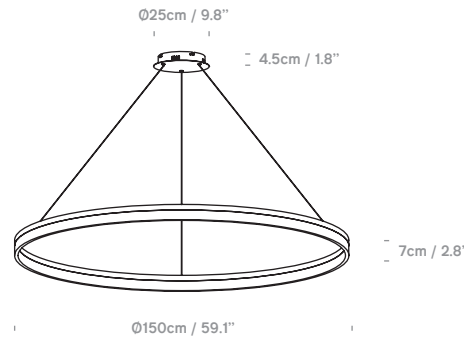

Ring 150
UK/EU: PR059198XX

Multiple Rings in Single Pendant Available

Order Format:
Product Code A +
Product Code B + ...

Example:
Ring 100 White + Ring 80 White
= PR05919001 + PR05916001

Drop Height at 1.5m from ceiling rose and adjustable for each ring.



Colour + EAN/UPC Code

- 01 - White**
 (RAL 9003 Matt)
 EAN:
 40: 5060481945349
 60: 5060481945356
 80: 5060481945363
 100: 5060481945370
 120: 5060481945387
 150: 5060481945394
- 02 - BLACK**
 (RAL 9011 Matt)
 EAN:
 40: 5060481945288
 60: 5060481945295
 80: 5060481945301
 100: 5060481945318
 120: 5060481945325
 150: 5060481945332



Category	Pendant
Material	Aluminium + PMMA
Cable	1.5m Silver Suspension & Output Power Cable.
Lightsource	Integrated LED
Switched	No
Class	Class II - Double Insulated

IP Rating	IP20
Product Weight	40: 2.1KGS / 60: 2.5KGS / 80: 3.5KGS 100: 4KGS / 120: 5KGS / 150: 7 KGS
Individual Carton Size	40: 47x47x15cm / 60: 66x66x15cm / 80: 89x89x16cm 100: 106x106x16cm / 120: 126x126x16cm 150: 156x156x16cm
Shipping Carton Quantity	1
Shipping Carton Weight	40: 4KGS / 60: 6KGS / 80: 7.5KGS 100: 13KGS / 120: 15KGS / 150: 20KGS

LED Chip	Samsung
Wattage	40: 15W / 60: 25W / 80: 35W 100: 45W / 120: 50W / 150: 60W
Luminous Flux	40: 1050lm / 60: 1750lm / 80: 2450lm 100: 3150lm / 120: 3500lm / 150: 4200lm
Colour Temp	3000K
CRI	90+ CRI
Dimmable	0-10v dimming / phase dimming dali dimming

Other Information	
Special Order:	3000K / 3500K / 4000K / 5000K, RAL colour, cable length customizable
Energy Efficiency:	Class F
LED Life:	Minimum 50,000h

